



OTL 50-3



OTL 95-3



OTL 150-3



OTL 300-3

Grey	●	MAA3050A10	MAA3095A10	MAA3150A10	MAA3300A10
Blue	●	MAA3050B10	MAA3095B10	MAA3150B10	MAA3300B10
Yellow-green	●	MAA3050Y10	MAA3095Y10	MAA3150Y10	MAA3300Y10

**Technical data**


Conductor cross-section Cu, Al (mm <sup>2</sup> )	1.5 - 50	6 - 95	25 - 150	95 - 300
Nominal voltage AC / DC (V)	1000	1000	1000	1000
Nominal current (A)	160 (Cu) / 145 (Al)	245 (Cu) / 220 (Al)	320 (Cu) / 290 (Al)	<b>630 (Cu) / 630 (Al)</b>
Width / Height / Length (mm)	46 / 41 / 80	59 / 51 / 84	71 / 54 / 84	101 / 78 / 120
Screw, hexagonal key	No. 5	No. 6	No. 6	No. 8
Tightening torque (Nm)	1,5 Nm (1,5 - 2,5 mm <sup>2</sup> ) 5 Nm (4 - 10 mm <sup>2</sup> ) 10 Nm (16 - 50 mm <sup>2</sup> )	12 Nm (6 - 25 mm <sup>2</sup> ) 22 Nm (35 - 95 mm <sup>2</sup> ) -	14 Nm (25 - 50 mm <sup>2</sup> ) 30 Nm (70 - 150 mm <sup>2</sup> ) -	35 Nm (95 - 150 mm <sup>2</sup> ) 45 Nm (180 - 300 mm <sup>2</sup> ) -
Mounting	DIN rail, screw	DIN rail, screw	DIN rail, screw	DIN rail, screw
Weight (g)	109	178	246	730
Package (pcs)	20	6	6	1

\* 630A achievable by connecting multiple input cables.


**Dimensions**

OTL 50-3


OTL 95-3

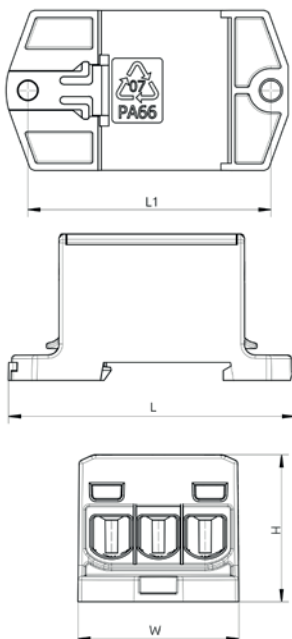

OTL 150-3

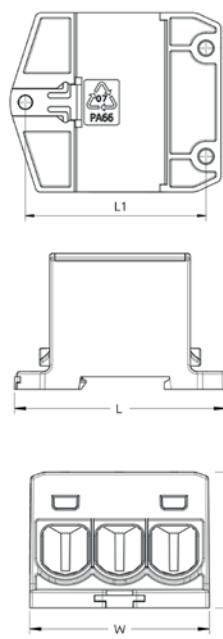

OTL 300-3

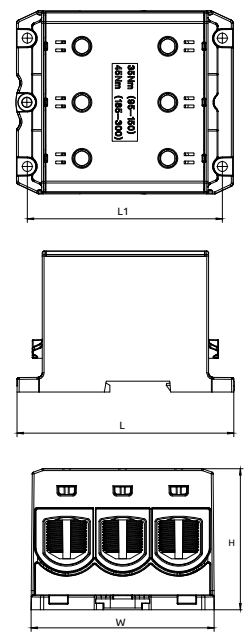



**OTL 95-2B**



**OTL 300-3B**

Grey	●	MAA2095A20	MAA3300A20
Blue	●	MAA2095B20	MAA3300B20
Yellow-green	●	MAA2095Y20	MAA3300Y20

Technical data		
Conductor cross-section Cu, Al (mm <sup>2</sup> )	6 - 95	95 - 300
Busbar cross-section, Cu (mm <sup>2</sup> )	3x1x24	3x1x32 - 6x1x40
Nominal voltage AC / DC (V)	1000	1000
Nominal current (A)	245 (Cu) / 220 (Al)	630 (Cu) / 630 (Al)
Width / Height / Length (mm)	42 / 51 / 84	101 / 78 / 120
Screw, hexagonal key	No. 6	No. 6, No. 8
Tightening torque (Nm)	12 Nm (6 - 25 mm <sup>2</sup> ) 22 Nm (35 - 95 mm <sup>2</sup> ) 8 Nm (3x1x24 mm)	35 Nm (95 - 150 mm <sup>2</sup> ) 45 Nm (180 - 300 mm <sup>2</sup> ) 15 Nm (3x1x32 - 6x1x40 mm)
Mounting	DIN rail, screw	DIN rail, screw
Weight (g)	125	499
Package (pcs)	15	1

Dimensions

OTL 95-2B

OTL 300-3B

