

Jaguar VXR Series



Mechanical Handling / General Purpose AC Variable Speed Drives

- 1Ø, 230V/50~60Hz, 0.4~2.2kW (½~3HP)
- 3Ø, 230V/50~60Hz, 0.4~15kW (½~20HP)*
- 3Ø, 400V/50~60Hz, 0.4~15kW (½~20HP)



- IP20 side-by-side mounting
- Optional integrated EMI filtered models
- Fast response to dynamic load changes - 64MHz CPU
- RoHS, CE, UL/cUL compliant
- V/F or Dynamic Torque Vector control
- >300% starting torque between 1-3Hz
- Improved open-loop low-speed stability
- 'Hit-and-Stop' control with holding torque
- Mechanical brake control output – torque generated
- PID with 'Dancer' control
- PTC thermistor input
- Input and Output phase-loss protection
- Loss-of-command signal detection
- Thermostatically operated long-life cooling fans (designed to operate for 10 years at 40°C)
- Life time / service due alarm output
- RS485 (RJ-45 IN/OUT) / Profibus / DeviceNet option cards
- Optional multi-function back-lit keypad with parameter COPY mode
- Encoder feedback (close-loop) and shaft-synchronizing options
- Synchronous (Permanent Magnet) motor options***
- Internal brake chopper




actual size

Options and ordering codes

* Special order
 *** Available soon

VXR	3A7	-	4	E																																			
	<table border="1"> <tr> <td>Maximum continuous output current (A)</td> <td>1A5</td> </tr> <tr> <td></td> <td>2A5</td> </tr> <tr> <td></td> <td>3A</td> </tr> <tr> <td></td> <td>3A7</td> </tr> <tr> <td></td> <td>5A</td> </tr> <tr> <td></td> <td>5A5</td> </tr> <tr> <td></td> <td>8A</td> </tr> <tr> <td></td> <td>9A</td> </tr> <tr> <td></td> <td>11A</td> </tr> <tr> <td></td> <td>13A</td> </tr> <tr> <td></td> <td>17A</td> </tr> <tr> <td></td> <td>18A</td> </tr> <tr> <td></td> <td>24A</td> </tr> <tr> <td></td> <td>33A</td> </tr> <tr> <td></td> <td>47A</td> </tr> <tr> <td></td> <td>60A</td> </tr> </table>	Maximum continuous output current (A)	1A5		2A5		3A		3A7		5A		5A5		8A		9A		11A		13A		17A		18A		24A		33A		47A		60A		<table border="1"> <tr> <td></td> <td>No filter</td> </tr> <tr> <td>E</td> <td>Integrated EMC filter</td> </tr> </table>		No filter	E	Integrated EMC filter
Maximum continuous output current (A)	1A5																																						
	2A5																																						
	3A																																						
	3A7																																						
	5A																																						
	5A5																																						
	8A																																						
	9A																																						
	11A																																						
	13A																																						
	17A																																						
	18A																																						
	24A																																						
	33A																																						
	47A																																						
	60A																																						
	No filter																																						
E	Integrated EMC filter																																						
			<table border="1"> <tr> <td>1</td> <td>Input voltage 230v/1ph</td> </tr> <tr> <td>4</td> <td>Input voltage 400v/3ph</td> </tr> <tr> <td>2</td> <td>Input voltage 200v/3ph</td> </tr> </table>	1	Input voltage 230v/1ph	4	Input voltage 400v/3ph	2	Input voltage 200v/3ph																														
1	Input voltage 230v/1ph																																						
4	Input voltage 400v/3ph																																						
2	Input voltage 200v/3ph																																						

Power and Control Connections

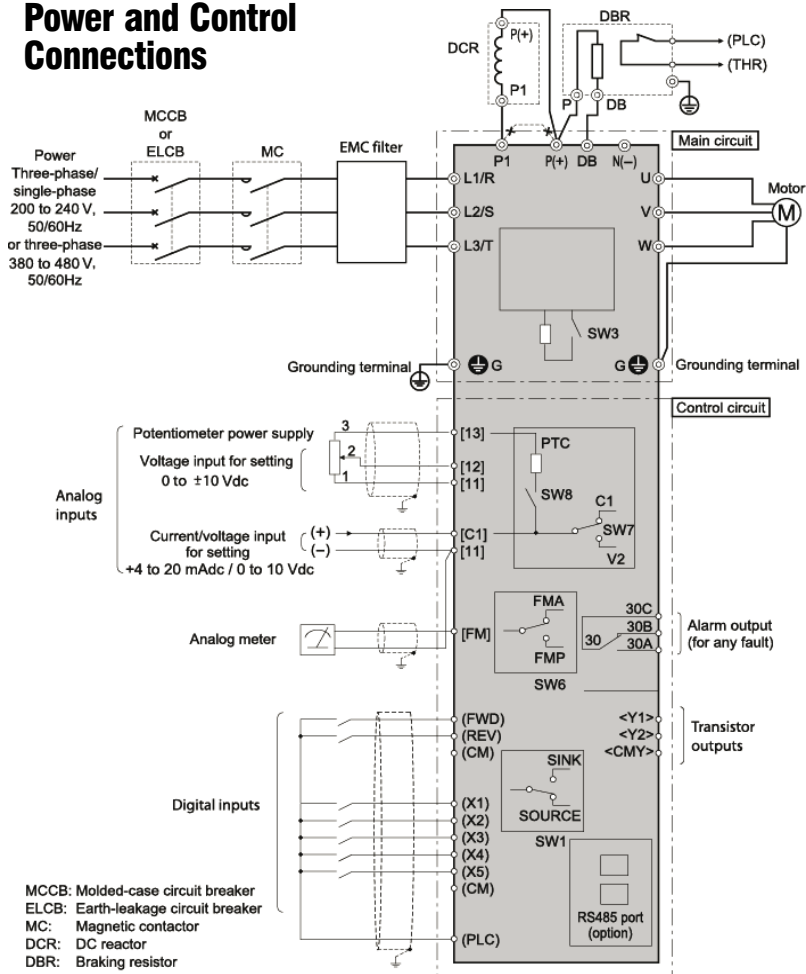

Specifications and Dimensions

All Models:

- Overload (A) = 150% for 60s, 200% for 0.5s
- Maximum operating temperature = 50°C
- Maximum output frequency = 400Hz
- Carrier frequency = 0.75~15kHz

Frame	H(mm)	H(ins)	W(mm)	W(ins)
1	120	4.72	80	3.15
2	130	5.12	110	4.33
3	180	7.09	140	5.51
4	220	8.66	180	7.09
5	260	10.24	220	8.66

3-phase input 380-480 +10% -15% 50/60Hz $\pm 5\%$								
Part Number VXR...	1A5-4	1A5-4E	2A5-4	2A5-4E	3A7-4	3A7-4E	5A5-4	5A5-4E
Motor rating (kW)	0.37/0.55	0.37/0.55	0.75/1.1	0.75/1.1	1.5	1.5	2.2	2.2
Motor rating (H.P)	0.5	0.5	1	1	2	2	3	3
Rated output current (A)	1.5	1.5	2.5	2.5	3.7	3.7	5.5	5.5
Frame size	2	2	2	2	2	3	3	3
Depth (mm)	126	169	150	193	150	194	150	194
Depth (inches)	4.96	6.65	5.91	7.60	5.91	7.64	5.91	7.64

1-phase input 200-240V $\pm 10\%$ 50/60Hz $\pm 5\%$								
Part Number VXR...	3A-1	3A-1E	5A-1	5A-1E	8A-1	8A-1E	11A-1	11A-1E
Motor rating (kW)	0.37/0.55	0.37/0.55	0.75/1.1	0.75/1.1	1.5	1.5	2.2	2.2
Motor rating (H.P)	0.5	0.5	1	1	2	2	3	3
Rated output current (A)	3 (2.5)	3 (2.5)	5 (4.2)	5 (4.2)	8 (7)	8(7)	11 (10)	11 (10)
Frame size	1	1	1	2	2	3	3	3
Depth (mm)	127	127	152	150	160	194	151	194
Depth (inches)	4.99	4.99	5.98	5.91	6.30	7.64	5.94	7.64

3-phase input 380-480V +10% -15% 50/60Hz $\pm 5\%$										
Part Number VXR...	9A-4	9A-4E	13A-4	13A-4E	18A-4	18A-4E	24A-4	24A-4E	30A-4	30A-4E
Motor rating (kW)	4	4	5.5	5.5	7.5	7.5	11	11	15	15
Motor rating (H.P)	5	5	7.5	7.5	10	10	5	5	20	20
Rated output current (A)	9	9	13	13	18	18	24	24	30	30
Frame size	3	3	4	4	4	4	5	5	5	5
Depth (mm)	151	194	158	158**	158	158**	195	195**	195	195**
Depth (inches)	5.94	7.64	6.22	6.22	6.22	6.22	7.68	7.68	7.68	7.68