




smartARS pro-PV

NH fuse switch disconnectors



smartARS 00
pro-PV

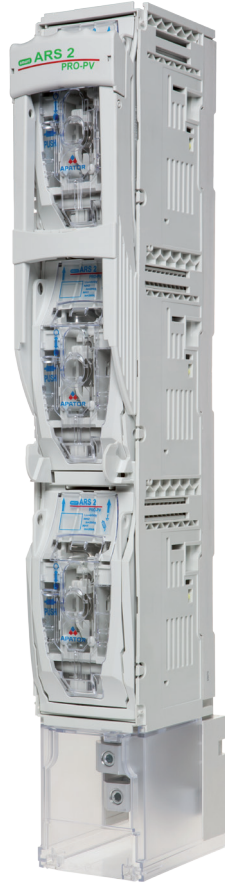

smartARS 2
pro-PV



smartARS 3
pro-PV

New smartARS pro-PV AC 800 V

A safe step into the future with Apator

The new switch fuse disconnecter smartARS in the AC800V product line is a device which has been developed to meet the needs and requirements of the future.

Solar power systems and a new generation of inverters are assembled on AC800V correctly and safely under load. In the future AC800V will be extended by the smartARS family; moreover, it can be modified to facilitate the digitization of the energy transition.

High-quality materials and years of experience of APATOR Group in the NH disconnectors sector ensure excellent cost-benefit ratio.

Table 1. Technical data

Parameter			smartARS 00 pro-PV	smartARS 2 pro-PV	smartARS 3 pro-PV
For NH fuse-links acc. to DIN VDE 0636-2		Size	00	1,2	3
Rated operational voltage	U_e	V	AC800	AC800	AC800
Rated operational current	I_e	A	80	200	400
Conv. free air thermal current with fuse-links	I_{th}	A	80	200	400
Rated frequency	f	Hz	50 - 60	50 - 60	50 - 60
Rated insulation voltage	U_i	V	AC1000	AC1000	AC1000
Rated impulse withstand voltage	U_{imp}	kA	8	12	12
Utilization category			AC21B 80A/ 800V	AC21B 200A/800V	AC21B 400A/ 800V
Fuse protected short circuit withstand		kA	100 ¹⁾	120 ¹⁾	120 ¹⁾
Fuse protected short circuit making		kA	100 ¹⁾	120 ¹⁾	120 ¹⁾
Max. permis. power loss per fuse-link	P_a	W	11	21	41
Pollution degree			3	3	3

¹⁾ with WTNH gG fuse links (500 V)

Table 2. Versions

Version		Weight	Article No.
for installation on to 185 mm busbar system, three pole switching - all phases simultaneously			
smartARS 00-3 pro-PV	cable terminals: bridge terminals with bridge clamps (5) 4-70mm ² , screw terminals with M8 screws	2,5 kg	63-073821-001
smartARS 00-3-V pro-PV	cable terminals: V-terminals with V-clamps 25-150 SW	2,6 kg	63-073821-002
smartARS 2-6-V pro-PV	cable terminals: V-terminals with V-clamps 240 mm ²	5,8 kg	63-073822-001
smartARS 3-6-V pro-PV	cable terminals: V-terminals with V-clamps 240 mm ²	6,6 kg	63-073822-002
smartARS 2-6-M pro-PV	cable terminals: screw terminals with pressed nuts M12	5,7 kg	63-073822-003
smartARS 3-6-M pro-PV	cable terminals: screw terminals with pressed nuts M12	6,5 kg	63-073822-004
smartARS 2-6-2V pro-PV	cable terminals: 2V-terminals with double V-clamps 240 mm ²	6,4 kg	63-073822-005
smartARS 3-6-2V pro-PV	cable terminals: 2V-terminals with double V-clamps 240 mm ²	7,2 kg	63-073822-006

APATOR recommends SIBA NH fuses for best protection of the new generation of PV String Inverters

The new series of SIBA NH fuses with operating class: gRL/gS has been developed for the line protection of the new PV String Inverters.

Due to the use of special geometries of melting elements, in comparison to the conventional line protection fuses (operating class: gG) a considerably faster operation at short circuits and thus optimum protection of the inverters has been realized. In the space-saving NH standard designs, the fuse links achieve a maximum breaking capacity of 120 kA with a test voltage of 880 V. The power losses of series NH1, NH2 and NH3 have been designed for the respective maximum power acceptance of the corresponding NH fuse bases.



SIBA article numbers:

20 309 34.80 NH00 AC 800V 80A 120 kA


20 311 34.Strom NH1 AC 800V 100 – 200A 120 kA

20 312 34.Strom NH2 AC 800V 160 – 250A 120 kA


20 313 34.Strom NH3 AC 800V 200 – 400A 120 kA

DIMENSIONS


smartARS 00 pro-PV

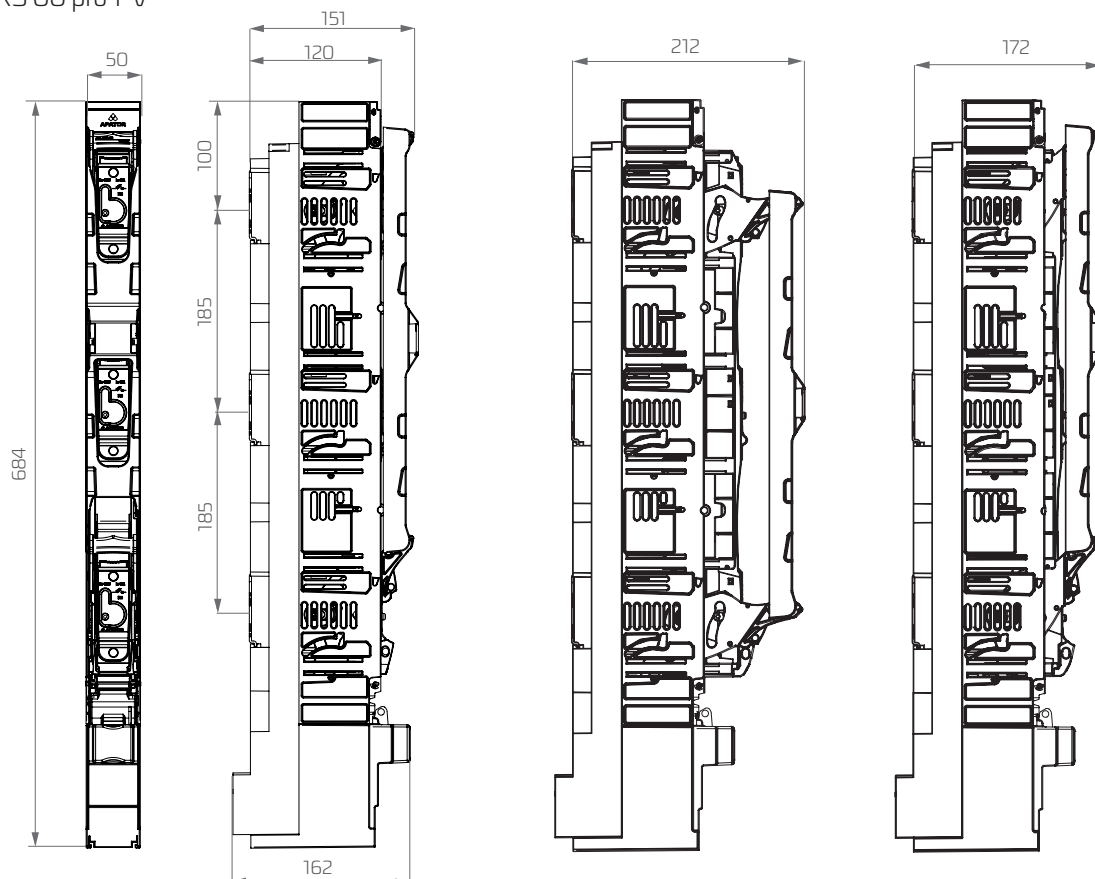

smartARS 2,3 -M,-V pro-PV

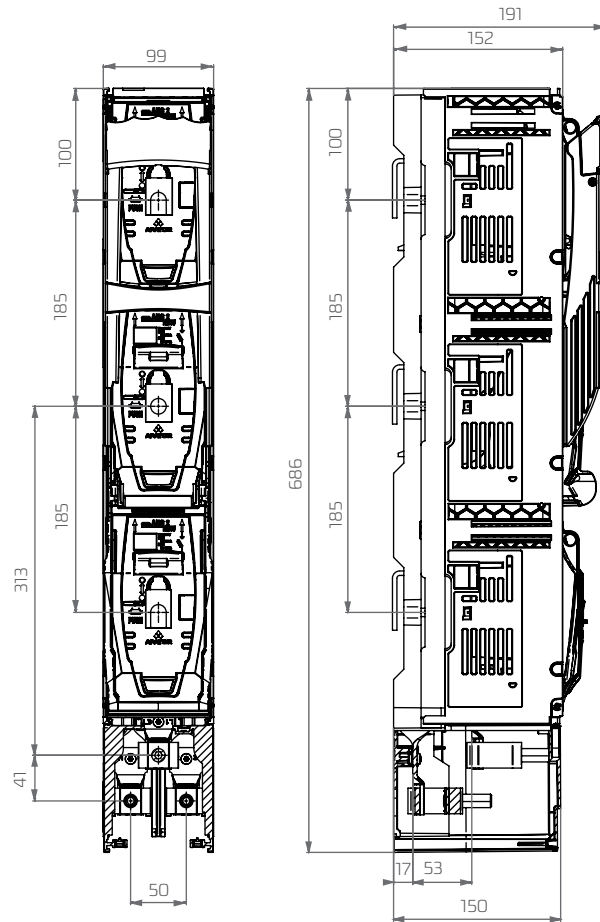

smartARS 2,3 -2V pro-PV

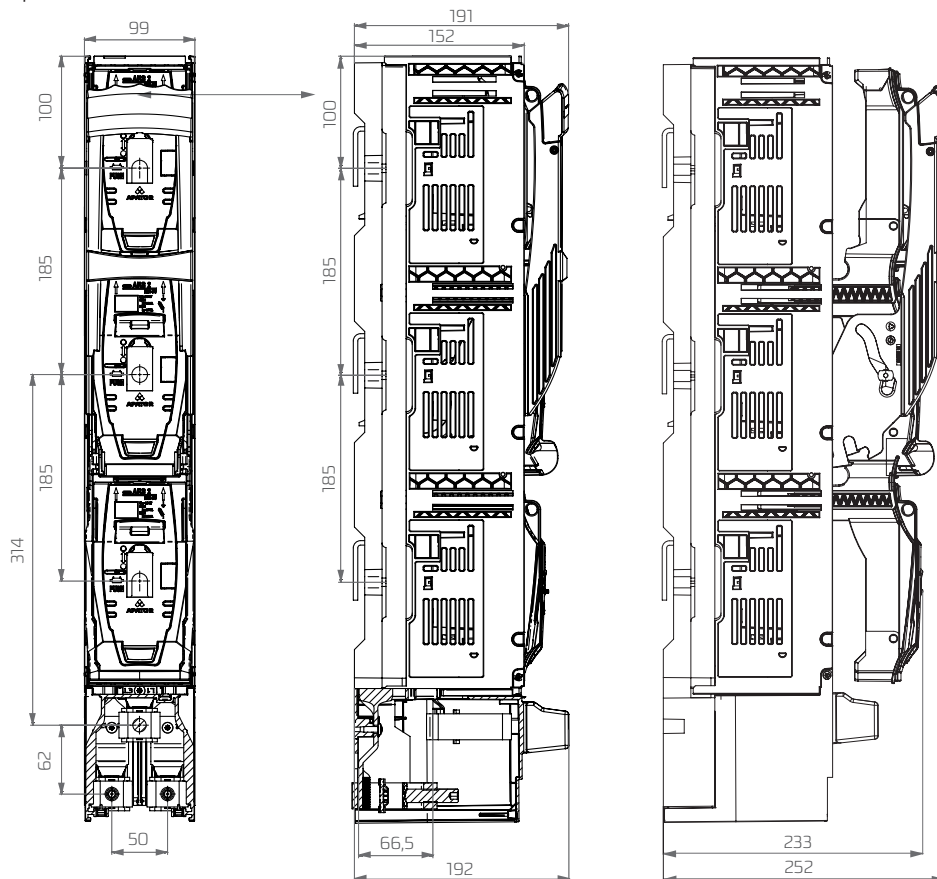



NOTES

the publication is only for information purposes
and it is not the offer in understanding of the law

DIRECTOR OF SWITCHGEAR DIVISION

Rober Łuczak (English, Russian)	robert.luczak@apator.com	+48 506 009 964
---------------------------------	--------------------------	-----------------

KEY ACCOUNT MANAGER

Rafał Kamiński (English, Russian) Central Europe, South East Europe	rafal.kaminski@apator.com	+48 506 009 338
--	---------------------------	-----------------

Michael Roclawski (German, English) Germany, Austria, Switzerland	michael.roclawski@apator.com	+48 506 009 339
--	------------------------------	-----------------

Krzysztof Zdrojewski (English) Middle East, South America, Asia, Africa	krzysztof.zdrojewski@apator.com	+48 506 009 309
--	---------------------------------	-----------------

Jevgenijus Samuchovas (Lithuanian, Russian) Eastern Europe, Baltic Countries	jevgenijus.samuchovas@apator.com	+370 62 842709
--	----------------------------------	----------------

Josef Kalleder (Romanian, English) Romania, Rep. of Moldova	josef.kalleder@apator.com	+40 74 5267192
--	---------------------------	----------------

TECHNICAL SUPPORT

Business Development Manager

Łukasz Melkowski (English)	lukasz.melkowski@apator.com	+48 506 009 334
----------------------------	-----------------------------	-----------------

Product Marketing Manager

Jakub Szczepkowski (English)	jakub.szczepkowski@apator.com	+48 506 009 395
------------------------------	-------------------------------	-----------------



APATOR SA

ul. Gdańska 4a, lok C4, 87-100 Toruń, Poland
lok. PL-87-100

Correspondence address:
Apator S.A. Centrum
Ostaszewo 57C, 87-148 Łysomice, Poland

e-mail trade@apator.com
head office tel. +48 56 61 91 494, +48 56 61 91 316, fax +48 56 61 91 295